



管线 球阀系列

PIPELINE BALL VALVE SERIES


麦斯凯阀门

麦斯凯为炼油、石油、化工、电站、采矿、造纸等行业提供流体过程控制解决方案，并提供满足解决客户严酷苛刻工况问题的阀门产品。

MSIK provides fluid process control solutions for refining, petroleum, chemical, power plant, mining, papermaking and other industries, and provides valve products to meet customers' severe and harsh working conditions.



PIPELINE BALL VALVE SERIES

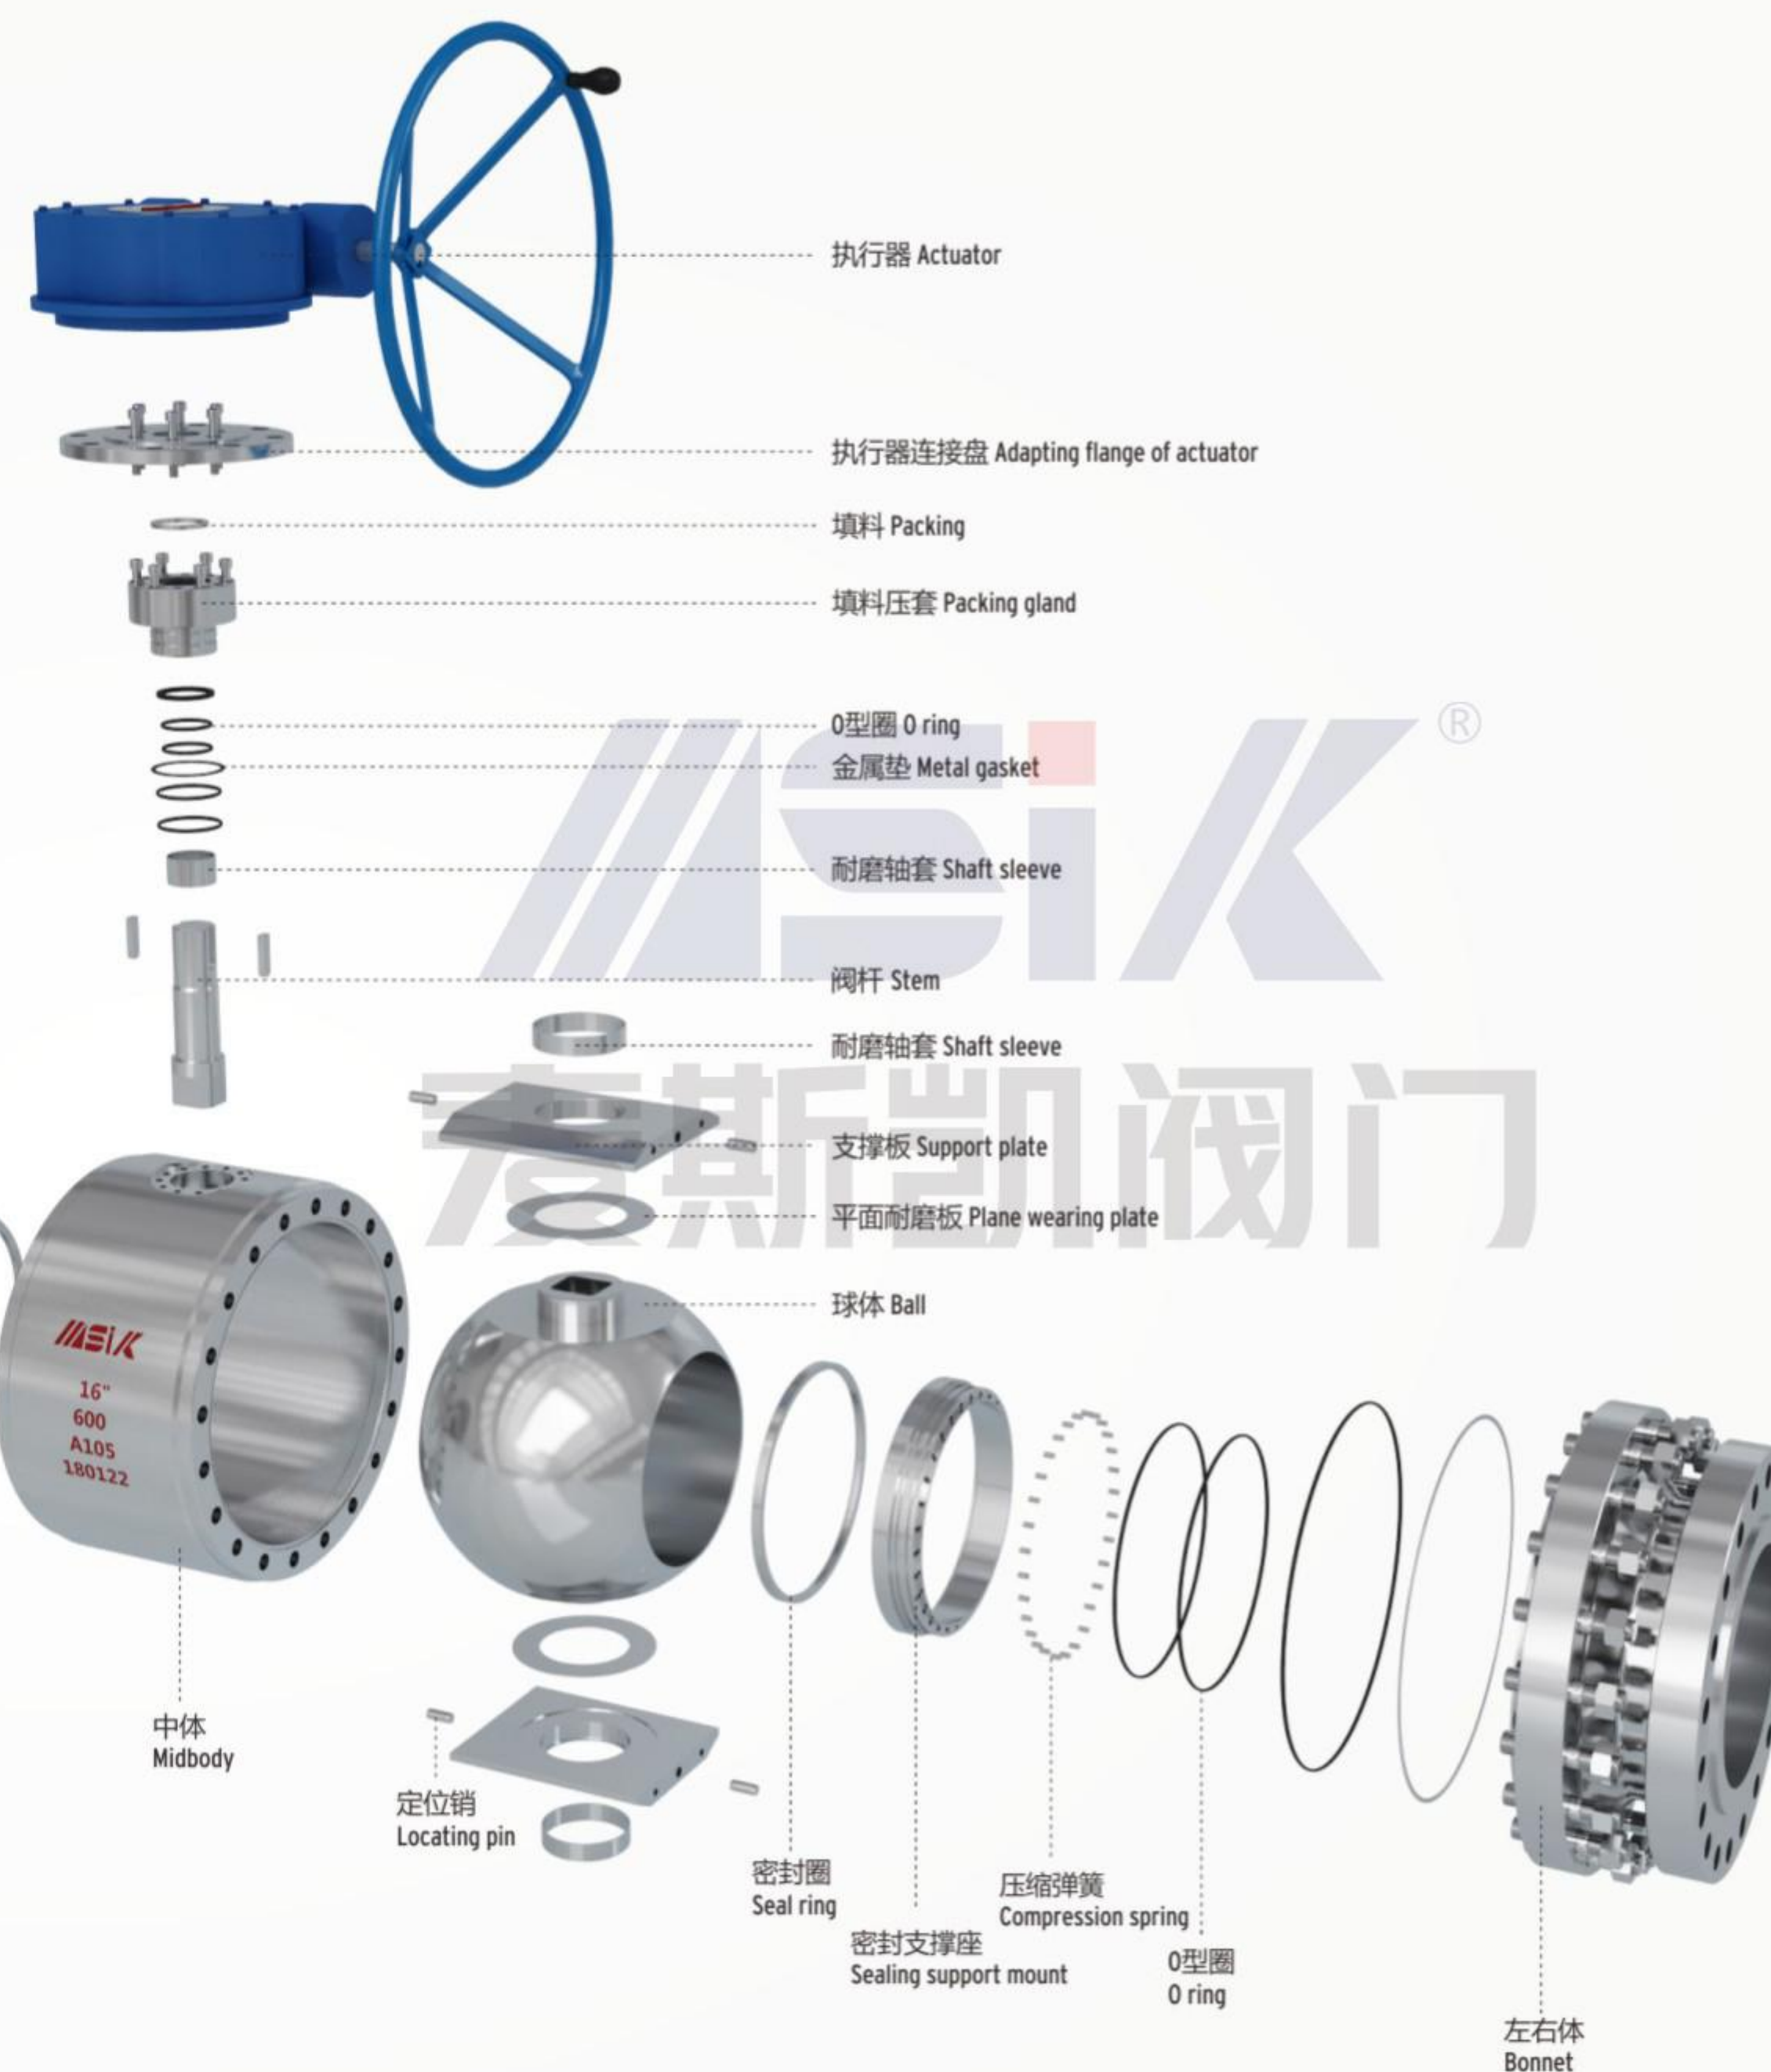

概述 INTRODUCTION

管线球阀适用于1.6MPa-25.0MPa Class150~Class1500，工作温度-28~300°C的石油、化工、火力电站等各种工况的管路上，切断或接通介质。管线球阀的适用介质为：石油、净化天然气、酸性天然气、煤气、水及煤浆等等介质。管线球阀的驱动装置操作方式有：手动、蜗轮传动、气动、电动、气液联动等。

Pipeline ball valve is applicable for the cutting off or connecting the medium of the pipelines in the fields such as petroleum, chemicals, thermal power station with 1.6MPa-25.0MPa Class150~Class1500, the operating temperature of -28~300°C. The suitable medium: petroleum, purified natural gas, acid natural gas, coal gas, water, coal slurry. The driving modes of the actuator: manually, worm gear, pneumatic, electric, pneumatic-hydraulic and so on.



Q41F/H/Y 锻钢法兰球阀
Forged steel flanged ball valve

公称压力: 1.0~42.0MPa, 150Lb~2500Lb
公称口径: DN15~200mm, NPS 1/2"~8"
适用温度: -29~425°C(具体温度范围视介质性质而定)
连接法兰: GB/T 9113, JB/T 79, HG/T 20592, ASME B16.5
阀门材料: A105, F304, F316, 特殊材料等
密封形式: 软、硬密封
配套附件: 安装法兰

NOMINAL PRESSURE 1.0~42.0MPa, 150Lb~2500Lb
NOMINAL DIAMETER DN15~200mm, NPS 1/2"~8"
APPLICABLE TEMPERATURE -29~425°C
(The detailed temperature range depends on the medium properties)
CONNECTION FLANGE GB/T 9113, JB/T 79, HG/T 20592, ASME B16.5
VALVE MATERIALS A105, F304, F316, Special materials and so on
SEAL TYPE Soft and hard seals
ACCESSORIES Flange



Q347F/H/Y 锻钢法兰固定球阀
Forged steel flanged fixed ball valve

公称压力: 1.0~16.0MPa, 150Lb~900Lb
公称口径: DN50~800mm, NPS 2"~32"
适用温度: -29~425°C(具体温度范围视介质性质而定)
连接法兰: GB/T 9113, JB/T 79, HG/T 20592, ASME B16.5
阀门材料: A105, F304, F316, 特殊材料等
密封形式: 软、硬密封
配套附件: 安装法兰

NOMINAL PRESSURE 1.0~16.0MPa, 150Lb~900Lb
NOMINAL DIAMETER DN50~800mm, NPS 2"~32"
APPLICABLE TEMPERATURE -29~425°C
(The detailed temperature range depends on the medium properties)
CONNECTION FLANGE GB/T 9113, JB/T 79, HG/T 20592, ASME B16.5
VALVE MATERIALS A105, F304, F316, Special materials and so on
SEAL TYPE Soft and hard seals
ACCESSORIES Flange



Q11F/H/Y 锻钢螺纹球阀
Forged steel threaded ball valve

公称压力: 1.0~10.0MPa, 150Lb~600Lb
公称口径: DN15~100mm, NPS 1/2"~4"
适用温度: -29~425°C(具体温度范围视介质性质而定)
连接法兰: GB/T 7306
阀门材料: A105, F304, F316, 特殊材料等
密封形式: 软、硬密封
配套附件: 螺纹连接

NOMINAL PRESSURE 1.0~10.0MPa, 150Lb~600Lb
NOMINAL DIAMETER DN15~100mm, NPS 1/2"~4"
APPLICABLE TEMPERATURE -29~425°C
(The detailed temperature range depends on the medium properties)
CONNECTION FLANGE GB/T 7306
VALVE MATERIALS A105, F304, F316, Special materials and so on
SEAL TYPE Soft and hard seals
ACCESSORIES Thread connection



Q947F/H/Y 锻钢电动法兰固定球阀
Forged steel electric flanged fixed ball valve

公称压力: 1.0~16.0MPa, 150Lb~900Lb
公称口径: DN50~800mm, NPS 2"~32"
适用温度: -29~425°C(具体温度范围视介质性质而定)
连接法兰: GB/T 9113, JB/T 79, HG/T 20592, ASME B16.5
阀门材料: A105, F304, F316, 特殊材料等
密封形式: 软、硬密封
配套附件: 安装法兰

NOMINAL PRESSURE 1.0~16.0MPa, 150Lb~900Lb
NOMINAL DIAMETER DN50~800mm, NPS 2"~32"
APPLICABLE TEMPERATURE -29~425°C
(The detailed temperature range depends on the medium properties)
CONNECTION FLANGE GB/T 9113, JB/T 79, HG/T 20592, ASME B16.5
VALVE MATERIALS A105, F304, F316, Special materials and so on
SEAL TYPE Soft and hard seals
ACCESSORIES Flange



Q41F 天然气专用球阀

Natural gas ball valve

公称压力: 1.6~2.5MPa
公称口径: DN40~100mm
适用温度: -29~180°C(具体温度范围视介质性质而定)
连接法兰: GB/T 9113、HG/T 20592
阀门材料: WCB、CF8、CF3、CF8M、CF3M、310S、特种钢
密封材料: RPTFE、M111
配套附件: 安装法兰

NOMINAL PRESSURE 1.6~2.5MPa
NOMINAL DIAMETER DN40~100mm,
APPLICABLE TEMPERATURE -29~180°C
(The detailed temperature range depends on the medium properties)
CONNECTION FLANGE GB/T 9113、HG/T 20592
VALVE MATERIALS WCB, CF8, CF3, CF8M, CF3M, 310S, Special steel
SEALING MATERIALS RPTFE, M111
ACCESSORIES Flange



Q367F 锻钢法兰管线球阀

Forged steel flanged pipeline ball valve

公称压力: 1.6~16.0MPa、150Lb~900Lb
公称口径: DN50~800mm、NPS 2"~32"
适用温度: -29~180°C(具体温度范围视介质性质而定)
连接法兰: GB/T 12224、ANSI B16.25
阀门材料: A105、F304、F316、特殊材料等
密封材料: RPTFE、M111、PEEK
配套附件: 安装法兰

NOMINAL PRESSURE 1.6~16.0MPa, 150Lb~900Lb
NOMINAL DIAMETER DN50~800mm, NPS 2"~32"
APPLICABLE TEMPERATURE -29~180°C
(The detailed temperature range depends on the medium properties)
CONNECTION FLANGE GB/T 12224, ANSI B16.25
VALVE MATERIALS A105, F304, F316, Special materials and so on
SEALING MATERIALS RPTFE, M111, PEEK
ACCESSORIES Flange



Q341F 法兰管线球阀

Flanged pipeline ball valve

公称压力: 1.6~10.0MPa、150Lb~600Lb
公称口径: DN50~800mm、NPS 2"~32"
适用温度: -29~180°C(具体温度范围视介质性质而定)
连接法兰: GB/T 9113、JB/T 79、HG/T 20592、ASME B16.5
阀门材料: WCB、CF8、CF3、CF8M、CF3M、310S、特种钢
密封材料: RPTFE、M111、PEEK
配套附件: 安装法兰

NOMINAL PRESSURE 1.6~10.0MPa, 150Lb~600Lb
NOMINAL DIAMETER DN50~800mm, NPS 2"~32"
APPLICABLE TEMPERATURE -29~180°C
(The detailed temperature range depends on the medium properties)
CONNECTION FLANGE GB/T 9113, JB/T 79, HG/T 20592, ASME B16.5
VALVE MATERIALS WCB, CF8, CF3, CF8M, CF3M, 310S, Special steel
SEALING MATERIALS RPTFE, M111, PEEK
ACCESSORIES Flange



Q647F 锻钢气动法兰管线球阀

Forged steel pneumatic flanged pipeline ball valve

公称压力: 1.0~16.0MPa、150Lb~900Lb
公称口径: DN50~800mm、NPS 2"~32"
适用温度: -29~180°C(具体温度范围视介质性质而定)
连接法兰: GB/T 9113、JB/T 79、HG/T 20592、ASME B16.5
阀门材料: A105、F304、F316、特殊材料等
密封材料: RPTFE、M111、PEEK
配套附件: 安装法兰

NOMINAL PRESSURE 1.0~16.0MPa, 150Lb~900Lb
NOMINAL DIAMETER DN50~800mm, NPS 2"~32"
APPLICABLE TEMPERATURE -29~180°C
(The detailed temperature range depends on the medium properties)
CONNECTION FLANGE GB/T 9113, JB/T 79, HG/T 20592, ASME B16.5
VALVE MATERIALS A105, F304, F316, Special materials and so on
SEALING MATERIALS RPTFE, M111, PEEK
ACCESSORIES Flange